


Technical data sheet

Roof conductor holder for tiled, slated and corrugated roofs, Rd 8–10

Item number: 5216818

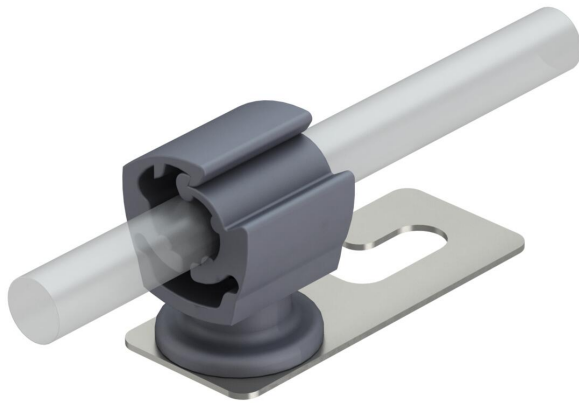

- Bottom section stainless steel (V2A)
- Bottom section with Ø 8.5 mm slot
- Conductor holder of polyamide

A2 Stainless steel

Master data

Item number	5216818
Type	159 K-VA
Description 1	Roof conductor holder
Manufacturer	OBO
Dimension	8-10mm
Material	Stainless steel 1.4301
Smallest sales unit	20
Unit of quantity	Piece
Weight	2 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,1204 kg CO2e / 1 Piece


Technical data sheet

Roof conductor holder for tiled, slated and corrugated roofs, Rd 8–10

Item number: 5216818



Dimensions

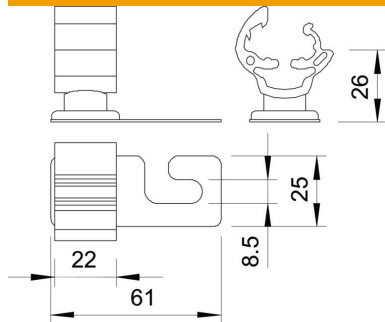

Length	61 mm
Width	25 mm
Height	38.5 mm

Technical data

Application	Corrugated roof
Conductor fastening type	With clamp clip
Conductor diameter, max.	10
Conductor diameter, min.	8
Mounting type	Screw-on
Mounting height	21 mm
Fit	Rd 8-10 mm
ROHS-conformant	yes
Material of the holder	Plastic
Material of the support	Rustproof steel (V2A)