

Technical data sheet

HG 47-LF fire protection cavity wall socket, air-tight

Item number: 7204320



Fire protection cavity wall socket to close off electrical installation openings in fire-resistant walls.

- Device socket, flat
- 2 x 3 screw domes
- Air-tight connection with other device sockets via connection nozzle, type ZH 11-V
- Max. 4 entries approved for cables with diameter ≤ 11 mm
- 2 M20/M25 entries (cable diameter ≤ 14 mm)

Delivery accessories: 5 x connection nozzles, type ZH 11-V

EI120/EI90 fire resistance (fire-resistant)

Approved in all installation zones according to DIN 18015-3, DIN 18040-2, DIN EN 17210.



Polypropylene / Thermoplastic elastomer

Master data

Item number	7204320
Type	HG 47-LF
Description 1	Cavity wall box airtight
Description 2	for fire rated walls
Available from	01.03.2024
Manufacturer	OBO
Dimension	Ø68mm, H47mm
Colour	orange / grey
Material	Polypropylene / Thermoplastic elastomer
Smallest sales unit	10
Unit of quantity	Piece
Weight	3.55 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,1166 kg CO2e / 1 Piece


Technical data sheet

HG 47-LF fire protection cavity wall socket, air-tight

Item number: 7204320



Dimensions

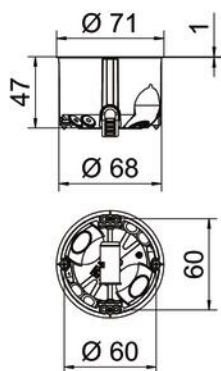

Technical data

ROHS-conformant | yes